

SC-70ML

METAL CORED ARC WELDING CONSUMABLES
FOR Mild & 490MPa CLASS HIGH TENSILE STEEL

2022.02

HYUNDAI WELDING CO., LTD.



❖ Specification

AWS A5.18 E70C-6M

(AWS A5.18M) E48C-6M)

EN ISO 17632-A T46 4 M M21 2 H5

JIS Z3313 T49 4 T15-1 M A-U

AWS D1.8

Wire Dia. mm(in)		
1.2(0.045)	1.4(0.052)	1.6(1/16)

* AWS D1.8 is available upon request

❖ Applications

SC-70ML can be used on mild and high tensile steel in single and multi-pass applications. It is ideally suited for high production and automatic applications where large amount of filler metal can be deposited with a minimum amount of slag & spatter. Typical industrial applications include shipbuilding, machinery, bridge, structural fabrication and building.

❖ Characteristics on Usage

SC-70ML is a metal-cored gas shielded cored wire which combines the high deposition rates of a flux cored wire with the high efficiencies of a solid wire. SC-70ML is recommended for welding of carbon steel having tensile strengths up to 490MPa Provide an exceptionally smooth and stable arc, low spatter and minimal slag coverage in welding

❖ Note on Usage


1. For preheating guidelines, please refer to your local standards and codes relative to your best practices
2. Use Ar + 20-25% CO2 gas.



Mechanical Properties & Chemical Composition of All Weld Metal

❖ **Welding Conditions**

Method by AWS Spec.

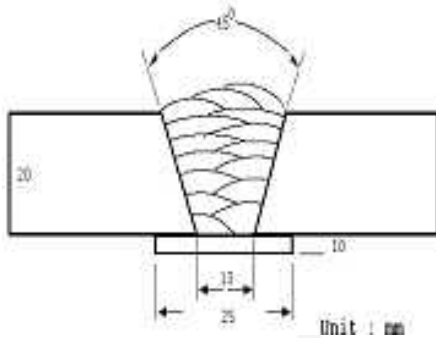

[Joint Preparation & Layer Details]

- Welding Position** : 1G(PA)
- Diameter** : 1.2mm (0.045in)
- Shielding Gas** : 80%Ar + 20%CO₂
- Flow Rate** : 20 ℓ /min
- Amp./ Volt.** : 280A/ 30V
- Stick-Out** : 20~25mm (0.79~0.98in)
- Pre-Heat** : R.T .
- Interpass Temp.** : 150±15℃ (302±59°F)
- Polarity** : DC(+)

❖ **Mechanical Properties of all weld metal**

Consumable	Tensile Test			CVN Impact Test J(ft · lbs)	
	YS MPa(lbs/in ²)	TS MPa(lbs/in ²)	EL (%)	-29℃ (-20°F)	-40℃ (-40°F)
SC-70ML	476(69,000)	553(80,000)	26.5	86(63)	75(55)
AWS A5.18 E70C-6M	≥ 390 (56,000)	≥ 480 (70,000)	≥ 22	≥ 27J at -29℃ (≥ 20ft · lbs at -20°F)	

❖ **Chemical Analysis of all weld metal(wt%)**

Consumable	C	Si	Mn	P	S
SC-70ML	0.040	0.56	1.57	0.011	0.014
AWS A5.18 E70C-6M	≤ 0.12	≤ 0.90	≤ 1.75	≤ 0.030	≤ 0.030


This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.



Mechanical Properties & Chemical Composition of All Weld Metal

❖ **Welding Conditions**

Method by AWS Spec.

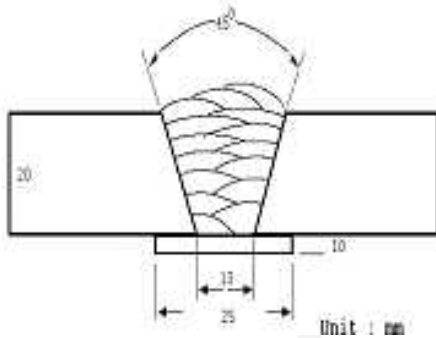

[Joint Preparation & Layer Details]

- Welding Position** : 1G(PA)
- Diameter** : 1.2mm (0.045in)
- Shielding Gas** : 90%Ar + 10%CO₂
- Flow Rate** : 20 ℓ /min
- Amp./ Volt.** : 280A/ 29V
- Stick-Out** : 20~25mm (0.79~0.98in)
- Pre-Heat** : R.T .
- Interpass Temp.** : 150±15℃ (302±59°F)
- Polarity** : DC(+)

❖ **Mechanical Properties of all weld metal**

Consumable	Tensile Test			CVN Impact Test J(ft · lbs)	
	YS MPa(lbs/in ²)	TS MPa(lbs/in ²)	EL (%)	-29℃ (-20°F)	-40℃ (-40°F)
SC-70ML	487(71,000)	565(82,000)	26.2	82(61)	69(51)
AWS A5.18 E70C-6M	≥ 390 (56,000)	≥ 480 (70,000)	≥ 22	≥ 27J at -29℃ (≥ 20ft · lbs at -20°F)	

❖ **Chemical Analysis of all weld metal(wt%)**

Consumable	C	Si	Mn	P	S
SC-70ML	0.043	0.59	1.62	0.010	0.018
AWS A5.18 E70C-6M	≤ 0.12	≤ 0.90	≤ 1.75	≤ 0.030	≤ 0.030


This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.



Mechanical Properties & Chemical Composition of All Weld Metal

❖ **Welding Conditions**

Method by AWS Spec.

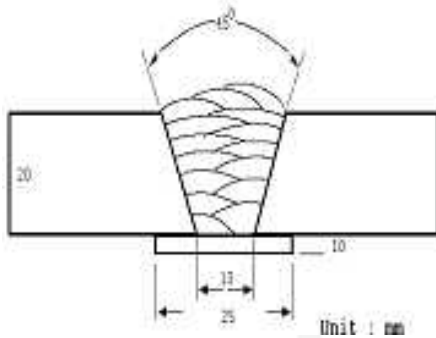

[Joint Preparation & Layer Details]

Welding Position	: 1G(PA)
Diameter	: 1.6mm (1/16in)
Shielding Gas	: 80%Ar + 20%CO ₂
Flow Rate	: 20 ℓ /min
Amp./ Volt.	: 300A/ 30V
Stick-Out	: 20~25mm (0.79~0.98in)
Pre-Heat	: R.T .
Interpass Temp.	: 150±15℃ (302±59°F)
Polarity	: DC(+)

❖ **Mechanical Properties of all weld metal**

Consumable	Tensile Test			CVN Impact Test J(ft · lbs)	
	YS MPa(lbs/in ²)	TS MPa(lbs/in ²)	EL (%)	-29℃ (-20°F)	-40℃ (-40°F)
SC-70ML	488(71,000)	560(81,000)	25.4	79(58)	70(52)
AWS A5.18 E70C-6M	≥ 390 (56,000)	≥ 480 (70,000)	≥ 22	≥ 27J at -29℃ (≥ 20ft · lbs at -29°F)	

❖ **Chemical Analysis of all weld metal(wt%)**

Consumable	C	Si	Mn	P	S
SC-70ML	0.045	0.59	1.52	0.011	0.016
AWS A5.18 E70C-6M	≤ 0.12	≤ 0.90	≤ 1.75	≤ 0.030	≤ 0.030


This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.



Impact Toughness Test on Various Temp.


❖ Welding Conditions

Method by AWS Rules

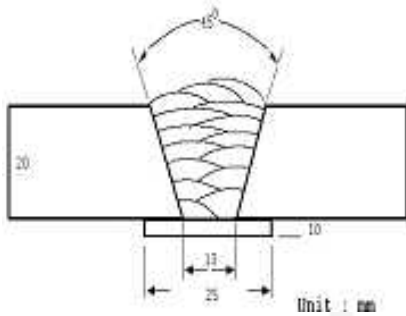

[Joint Preparation & Layer Details]

Diameter	:	1.2mm (0.045in)
Shielding Gas	:	80%Ar + 20%CO ₂
Flow Rate	:	20 ℓ /min
Amp./ Volt.	:	280 / 30
Stick-Out	:	20~25mm (0.79~0.98in)
Pre-Heat	:	Room Temp.
Interpass Temp.	:	150±15°C (302±59°F)
Polarity	:	DC(+)

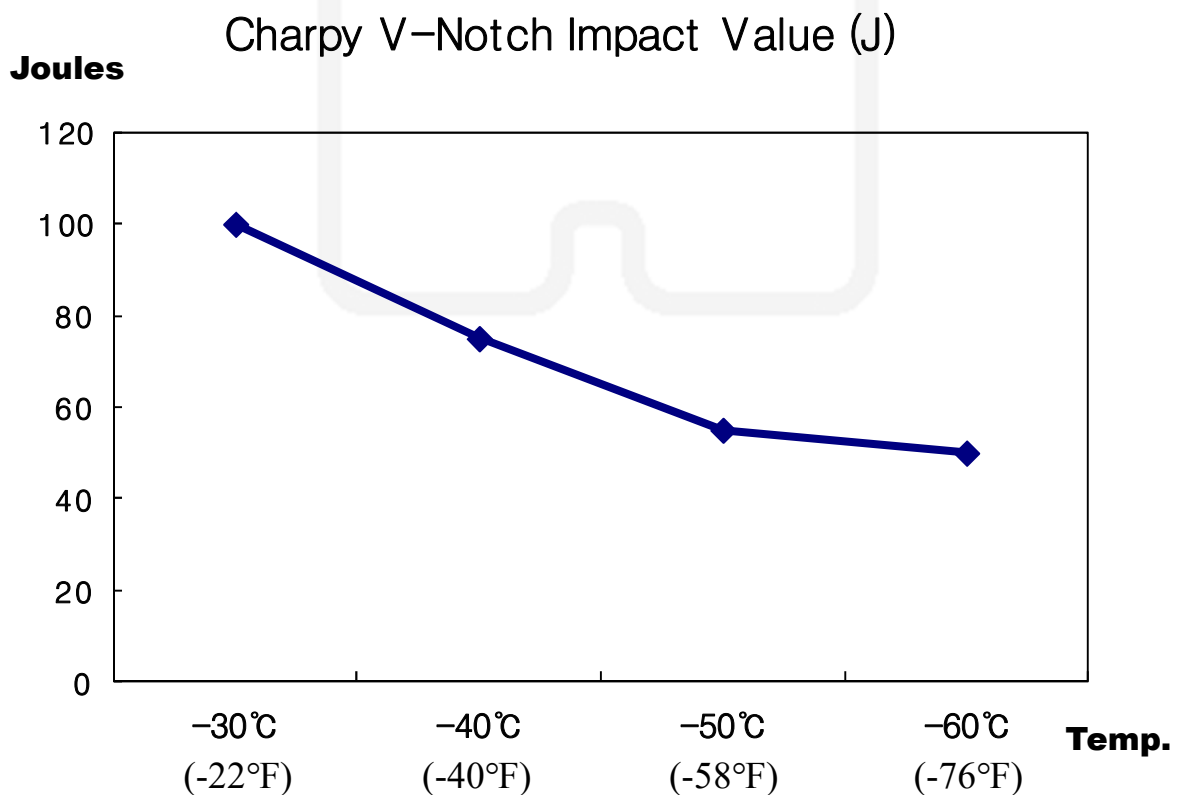

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.



Diffusible Hydrogen Content

❖ Welding Conditions

Diameter	: 1.2mm (0.045in)	Amps / Volts	: 280A / 30V
Shielding Gas	: 80%Ar +20%CO2	Stick-Out	: 20~25mm (0.79~0.98in)
Flow Rate	: 20 l /min	Welding Speed	: 30 cm/min (12 in/min)
Welding Position	: 1G (PA)	Current Type & Polarity	: DC(+)

❖ Hydrogen Analysis Using Gas Chromatography Method

Hydrogen Evolution Time	: 72 hrs
Evolution Temp.	: 45 °C (113°F)
Barometric Pressure	: 780 mm-Hg

❖ Result(ml/100g Weld Metal)

X1	X2	X3	X4
3.8	3.9	3.7	3.5

Average Hydrogen Content 3.7 ml / 100g Weld Metal



Welding Efficiency

❖ Deposition Rate & Efficiency

Wire Size	Welding Conditions		Wire Feed Speed m/min (in/min)	Deposition Efficiency(%)	Deposition Rate kg/hr(lb/hr)
	Amp.(A)	Volt.(V)			
1.2mm (0.045in)	200	24	6.7(260)	90~92	2.6(5.7)
	250	28	9.8(390)	91~93	3.8(8.4)
	300	30	12.7(500)	94~95	5.3(11.7)
1.6mm (1/16in)	230	27	3.8(150)	90~92	2.8(6.2)
	280	29	5.1(200)	92~93	4.2(9.2)
	340	30	6.2(244)	93~96	5.1(11.2)
Remark			Deposition efficiency =(Deposited metal weight/ Wire weight used)×100	Deposition rate =(Deposited metal weight/ Welding time,min.)×60	

* Shielding Gas : 80%Ar+20%CO2



Proper Welding Condition

❖ Proper Current Range

Consumable	Shielding Gas	Welding Position	Wire Dia.		
			1.2mm (0.045in)	1.4mm (0.052in)	1.6mm (1/16in)
SC-70ML	80%Ar+ 20%CO ₂	F & HF	200~300Amp	260~320Amp	290~340Amp

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.



Approvals

❖ Shipping Approvals

Welding Position	Register of shipping & Size mm(in)			
	ABS	LR	BV	DNV
F,HF V-up	4Y400SA H5 1.2~1.6 (0.045~1/16)	4Y40SH5 1.2~1.6 (0.045~1/16)	SA4Y40M HHH 1.2~1.6 (0.045~1/16)	IVY40MSH5 1.2~1.6 (0.045~1/16)

❖ F No & A No

F No	A No
6	1